

Introducing Top Compact

The small yet sustainable office hero.

- Neat and compact – not much bigger than an A4 page
- Low energy consumption
- Cooling capacity: 5–25 regular users
- Choice of three refreshing water types: unchilled and chilled still, and sparkling



Top Compact

The small yet sustainable office hero.



Cooling capacity tailored to **lower consumption needs**

BRITA CLARITY Protect filter preserves minerals in water while removing unwanted substances

Pre-programmable **portion control** and water temperature



Our water dispensers produce 86% less CO₂ emissions than pre-bottled water and 64% less than bottled water dispensers

[Watch our Video on Youtube](#)



Contact us today and let's talk about your BRITA water dispenser solution | www.brita.net

 **BRITA**



ThermalGate™
powerful thermal-disinfection feature




Convenient touch **dispensing buttons** for easy handling

Leakage detection system as standard

Focus on sustainability: natural refrigerant and extremely low power consumption



Two installation options:
• Floorstanding
• Countertop








Top Compact



Technical data



Model	Top Compact still + sparkling	Top Compact still	
Design / Type	countertop	countertop	base cabinet
Types of water	  	 	
Configuration options			
For installation independent of existing counters			
Specifications			
Cooling capacity	5-25 regular users	5-25 regular users	
Unit dimensions (W x H x D)	264 x 382 x 436 mm	264 x 382 x 436 mm	base cabinet: 278 x 910 x 518 mm base plate: 440 x 4 x 510 mm
Dispensing height	302 mm (with drip tray) 330 mm (without drip tray)	302 mm (with drip tray) 330 mm (without drip tray)	
Weight	16 kg	16 kg	base cabinet: 16 kg base plate: 6 kg
Max. power consumption	117 W	117 W	
Max. flow rate	2 l/min	2 l/min	

CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Reduces:

- particles such as microplastics and sand
- per- and polyfluoroalkyl substances (PFAS)
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts




CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.

CLARITY Protect reduces:

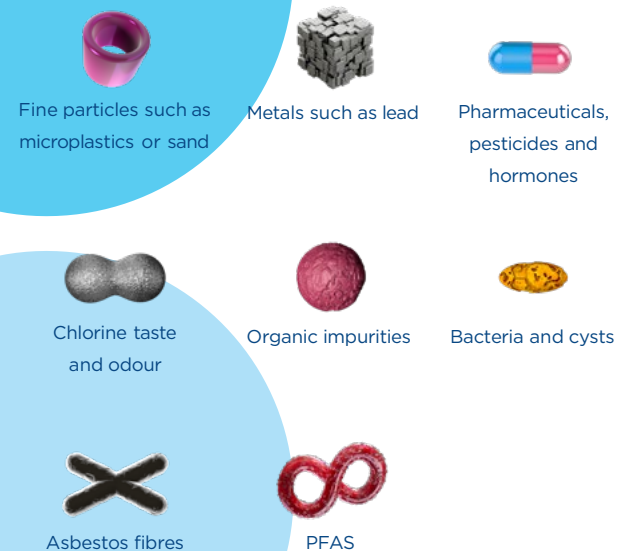

Contact us today and let's talk about your
BRITA water dispenser solution | www.brita.net



The right balance
Preserves minerals
in water

**Activated carbon
filtration**
Reduces substances
that impair taste and
odour

Pre-filter
Removes particles



Hollow fibre membrane
Nominal pore size of
0.15µm filters out
99.999% of bacteria
and 99.95% of cysts

Filter capacity:
Protect: 11,500 l

Exceptionally clean,
safe water

Protects equipment
lowering dispenser
maintenance costs



CLARITY Protect



Technical data



Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of PFAS	> 99% (NSF 53 testet by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-20)
Reduction of cysts	99.95% (NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm